



THREE POINT MOUNTED TEDDERS 4 & 6 Rotors

WOLAGRI[®]

tonuttigroup

LYBRA

420 - 540 - 580 - 640






Robust and safe pivoted attachment

The robustness of Lybra makes it perfect for any type of forage:

- Automatic locking of three point hitch for safe transport on the road.
- Double headstock dampener for perfect stability while working and on the road.
- Safe on curves and perfect alignment with the tractor.

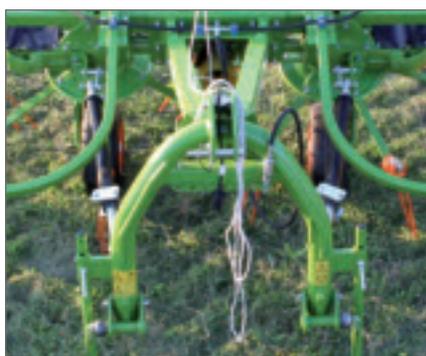

Homogeneous spreading for quality forage

The small diameter rotors and tine-carrying arms that intersect perfectly between themselves ensure homogeneous spreading.

The tines of different lengths produce precise spreading and always guarantee a clean product.

Excellent adaptation to the ground thanks to the reduced distance between tines and the wheels.



Fast and easy adjustments

Operating on the forks is possible to adjust the direction of the wheels, so the spreading angle of the machine (useful along field edges).



THREE POINT MOUNTED TEDDERS

4 & 6 rotors

LYBRA 420 - 540 - 580 - 640



Hydraulic closing system

Once over the work on the field, the side arms of the tedder can be lifted to transport position (shown in picture below) hydraulically from tractor's seat.

There's no need to leave tractor's cabin, mount protections or rotate parts of machine: safety locks engage automatically when side frames reach transport position. LYBRA 580 and 640 are equipped with a road lights and signalisation kit as standard.



Wheel deflectors (optional)

LYBRA 580 and 640 can be equipped with wheel deflectors which avoid the product to wrap on the forks; spreading it's easier and hay has better quality.



Additional support wheel (optional)

A front wheel mounted on the three point hitch, adjustable in height, which ensures a perfect following of terrain profile.



Technical data	LYBRA 420	LYBRA 540	LYBRA 580	LYBRA 640
Hitch category	three point mounted / Cat. I-II			
Type of connection	Pivoting			
Working width DIN - cm	420	540	580	640
Transport width - cm	230	250	290	300
Number of rotors	4	4	6	6
Number of arms per rotor	6	6	6	6
Axle	adjustable fixed wheels	adjustable fixed wheels	adjustable fixed wheels	adjustable fixed wheels
Tyres size	15x6.00-6	16x6.50-6	16x6.50-6	16x6.50-6
Required power (kW/hp)	29/40	29/40	36/50	36/50
PTO Shaft	standard			
Folding in transport position	hydraulic vertical folding - turnable heads		hydraulic vertical folding	
Wheel deflectors	na		optional	
Light and Road signal kit	na		standard	
Safety protections	standard			
Double headstock dampener	standard			
Hydraulic equipment	1 SE			
Weight - Kg	460	530	830	850

The WOLAGRI range: High PERFORMANCE, QUALITY AND RELIABILITY



www.tonuttigroup.com

TONUTTI WOLAGRI S.p.A.

Head Office

and Production Plant
Via Gino Tonutti 3 - 33047
Remanzacco (UD) Italy
Phone + 39 0432 667015
Fax + 39 0432 668282
info@tonuttigroup.com

Production Plant

Via Veneto 12/A - 46029
Suzzara (MN) Italy
Phone +39 0376 51211
Fax +39 0376 522215
info@tonuttigroup.com

Tonutti U.S.A. Inc

1655 Panama Street
Memphis, TN 38108
Phone (901) 385 8841
Fax (901) 385 8288
info@tonuttiusa.com

Tonutti Russia T.W. Limited

3 Tekhnicheskaya Street
Perm, 614070 Russia
Phone 007 3422 909096
Fax 007 3422 909096
twltd@perm.ru

TONUTTI WOLAGRI S.p.A. reserves the right to make changes or add improvements at any time without notice. The information contained here in is general in nature and is not intended for specific application purposes.

