



# TRAILED DISC MOWER CONDITIONER



## ALCOR



### ● FRONT MOUNTED

The pull type mounted attachment allows the mower to follow easy the line of the land in extremely precise manner adapting to humps and hollows reducing the risk to damage the cutter-bar.

### ● SUSPENSION BY DOUBLE SPRINGS

Double spring shock absorbers allow setting the best weight for the mower to maintain even pressure on the ground, always giving a clean cut without damaging the grassy surface.

### ● DRAW BAR

The "Swing " mower is attached to the two rear lift arms allowing the operator to modify the height in all working operations.





● **MAIN SUPPORT** 1

Assembled in one module to the cover with 6 bolts to maximize the strength of the support. It lets you easily inspect inside the cutter bar. Bearings with strong stress transmissibility (30mm pitch) can bear the greatest shear strains and the bearings are spaced to enhance resilience.

2 Pinion thickness is 17 mm.  
and diameter of the shaft is 35 mm

● **COVER**

Heavy thickness (5 mm) with an integrated reinforcement. 3 This application helps prevent flexing, to avoid the twist-ing of moving parts, especially on uneven terrain. Oil capacity: this leads to an improved lubrication, a fester cooling and efficient movement. 4

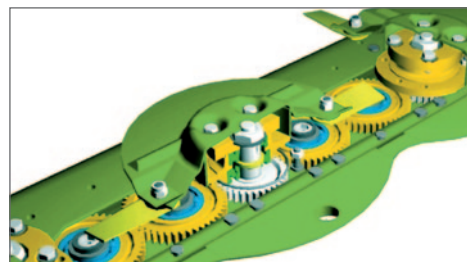
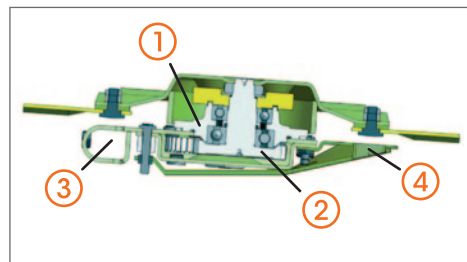


**SUSPENSION “SWING” BY DOUBLE SPRINGS**

- Regular cutting
- Easy obstacle passage
- Greater speed cutting
- Increased production
- Less power required
- Cutter bar hardwearing



**RUBBER ROLLER CONDITIONER (MODEL R)**

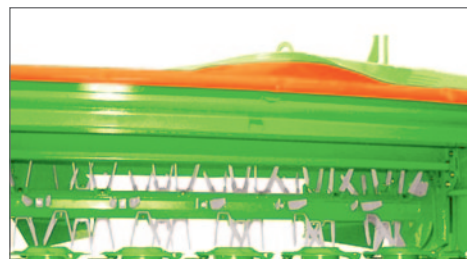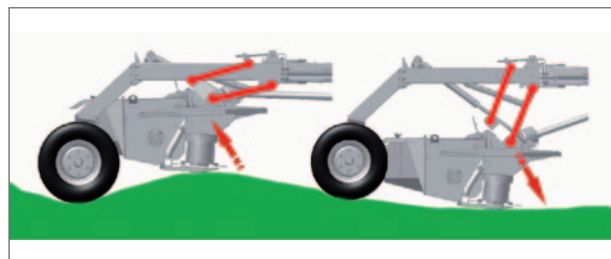

**FINGER CONDITIONER (MODEL F)**

ALCOR	245F	285F	320F	245R	285R	320R
Cutting width cm/ft	242/8'0"	284/9'4"	318/10'8"	242/8'0"	284/9'4"	318/10'8"
Weight kg	1550	1740	1810	1640	1820	1910
Number of disks	6	7	8	6	7	8
Number of blades	12	14	16	12	14	16
Pto speed RPM	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000
Pto power hp/kw	40/60	60/70	70/80	40/60	60/70	70/80
Conditioner	Finger	Finger	Finger	Roller	Roller	Roller
Pneumatic system	10.0/75-15.3	10.0/75-15.3	10.0/75-15.3	10.0/75-15.3	10.0/75-15.3	10.0/75-15.3

**TONUTTI WOLAGRI S.p.A.**

**Head Office and Production Plant**

Via Gino Tonutti 3 - 33047  
Remanzacco (UD) Italy  
Phone + 39 0432 667015  
Fax + 39 0432 668282  
info@tonuttigroup.com

**Production Plant Suzzara**

Via Veneto 12/A - 46029  
Suzzara (MN) Italy  
Phone +39 0376 51211  
Fax +39 0376 522215  
info@tonuttigroup.com

**Tonutti U.S.A. Inc**

1655 Panama Street  
Memphis, TN 38108  
Phone (901) 385 8841  
Fax (901) 385 8288  
info@tonuttiusa.com

**Tonutti Russia T.W. Limited**

3 Tekhnicheskaya Street  
Perm, 614070 Russia  
Phone 007 3422 909096  
Fax 007 3422 909096  
twltd@perm.ru